



MODEL NUMBER	DESCRIPTION
300GC-024	SelecTone [®] speaker/amplifier, 24VAC/DC, gain control
300GC-120	SelecTone [®] speaker/amplifier, 120VAC, gain control
300GC-240	SelecTone [®] speaker/amplifier, 240VAC, gain control
300GCX-024	SelecTone [®] speaker/amplifier, 24VAC/DC, hazardous location, gain control
300GCX-120	SelecTone [®] speaker/amplifier, 120VAC, hazardous location, gain control
300GCX-240	SelecTone [®] speaker/amplifier, 240VAC, hazardous location, gain control

**Selectone[®] Speaker Amplifier
Model 300GC**




SHORT SELLING STORY

**SELECTONE 300GC
IS IDEAL FOR USE AS**

- Plant-wide warning and voice communication
- Digital voice messaging
- Live public address
- Emergency warning
- Simple signaling like Start & Dismissal
- Process Control Signaling
- Communication in loud and harsh environments

300GC

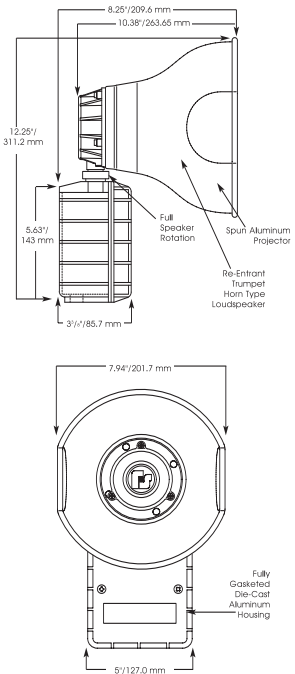

300GC

- Built-in gain control (volume control)
- 24VAC/VDC, 120VAC and 240VAC
- Produces 110dB at 10 feet
- **300GC**—Type 3R enclosure (protection against falling dirt, rain, sleet, snow, and windblown dust)
- **300GCX**—Type 4R enclosure (watertight, dustight, corrosion resistant)
- UL and cUL Listed, CSA Certified, CSFM Approved

FEATURES

- Produces clear, crisp tones
- Rugged spun aluminum construction and powder coat paint
- Internal gain control allows adjustment from 86dB to 110dB
- Can be a stand alone signal or part of a system
- Type 3R for indoor or outdoor

BENEFITS

- Clearly heard over distance or in high ambient noise situations
- Resists vandalism and the effects of harsh environments
- Great flexibility and user friendliness
- Flexibility and expandability
- Suitable for rain tight outdoor applications

APPLICATIONS

- Manufacturing
- Warehouses
- Process control

POSSIBLE CUSTOMERS

- MRO
- Systems users
- Systems integrators

COMPETITIVE ADVANTAGES

- Ease of use
- Rugged construction
- Dependability
- Clarity of signal
- 5-year warranty

